











# Commercial Fittings

## Ultima™ Sensor-Operated Toilet Flush Valves – Diaphragm-Type Battery Powered

- Hygienic, touch-free operation
- Side-mount sensor-operated gear operator automatically flushes the valve
- Chrome-plated metal cover
- Electronically operated override button
- Includes (4) C-sized Duracell® batteries
- Exclusive DynaClean™ self-cleaning wiper spring technology
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit



Sensor-Operated Toilet Flush Valves	DESCRIPTION	COLOR/FINISH	LIST PRICE
<b>1.6 gpf/6.0 Lpf</b>			
 	<b>6147SM161 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	.002 Polished Chrome	488
	<b>6147SM162 Same as Above</b> <ul style="list-style-type: none"> <li>• 27" (686 mm) rough-in</li> <li>• Tube can be cut during installation for shorter rough-in</li> </ul>	.002 Polished Chrome	505
<b>1.28 gpf/4.8 Lpf</b>			
 	<b>6147SM121 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul> 	.002 Polished Chrome	488
	<b>6147SM122 Same as Above</b> <ul style="list-style-type: none"> <li>• 27" (686 mm) rough-in</li> <li>• Tube can be cut during installation for shorter rough-in</li> </ul> 	.002 Polished Chrome	505
<b>1.1 gpf/4.2 Lpf</b>			
 	<b>6147SM111 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> <li>• <b>NOTICE:</b> To ensure proper performance, this 1.1 gpf/4.2 Lpf toilet flush valve <u>must</u> be installed on a flushometer bowl that is certified (per ASME A112.19.2/CSA B45.1) to operate at 1.1 gpf/4.2 Lpf</li> </ul> 	.002 Polished Chrome	488
			




Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019*.

# Commercial Fittings

## Ultima™ Sensor-Operated Exposed Clinic Sink Flush Valve – Diaphragm-Type Battery Powered

- Hygienic, touch-free operation
- Side-mount sensor-operated gear operator automatically flushes the valve
- Chrome-plated metal cover
- Electronically operated override button
- Includes (4) C-sized Duracell® batteries
- Exclusive DynaClean™ self-cleaning wiper spring technology
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit

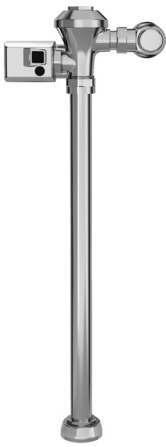

Sensor-Operated Toilet Flush Valves	DESCRIPTION	COLOR/FINISH	LIST PRICE
6.5 gpf/24.6 Lpf			
  	<p><b>6147SM117 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b></p> <ul style="list-style-type: none"> <li>• 27" (686 mm) rough-in</li> <li>• Tube can be cut during installation for shorter rough-in</li> </ul>	.002 Polished Chrome	502












Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019.*

# Commercial Fittings

## Ultima™ Sensor-Operated Exposed Urinal Flush Valves – Diaphragm-Type Battery Powered

- Hygienic, touch-free operation
- Side-mount sensor-operated gear operator automatically flushes the valve
- Chrome-plated metal cover
- Electronically operated override button
- Includes (4) C-sized Duracell® batteries
- Exclusive DynaClean™ self-cleaning wiper spring technology
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit



Sensor-Operated Urinal Flush Valves	DESCRIPTION	COLOR/FINISH	LIST PRICE
<b>1.0 gpf/3.8 Lpf</b>			
  	<b>6145SM101 Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	.002 Polished Chrome	488
<b>0.5 gpf/1.9 Lpf</b>			
  	<b>6145SM051 Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	 .002 Polished Chrome	488
<b>0.125 gpf/0.5 Lpf</b>			
  	<b>6145SM013 Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	 .002 Polished Chrome	488













Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019*.

# Commercial Fittings

## Ultima™ Manual Exposed Toilet Flush Valves – Diaphragm-Type

- Exclusive DynaClean™ self-cleaning wiper spring technology
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- ADA-compliant non-hold open handle provides automatic shut-off after every flush
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit



Manual Toilet Flush Valves	DESCRIPTION	COLOR/FINISH	LIST PRICE
<b>1.6 gpf/6.0 Lpf</b>			
  	<b>6147161 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> • 11-1/2" (292 mm) rough-in	.002 Polished Chrome	192
	<b>6147162 Same As Above</b> • 27" (686 mm) rough-in • Tube can be cut during installation for shorter rough-in		209
<b>1.28 gpf/4.8 Lpf</b>			
  	<b>6147121 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> • 11-1/2" (292 mm) rough-in 	.002 Polished Chrome	192
	<b>6147122 Same As Above</b> • 27" (686 mm) rough-in • Tube can be cut during installation for shorter rough-in 		209
<b>1.1 gpf/4.2 Lpf</b>			
  	<b>6147111 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b> • 11-1/2" (292 mm) rough-in 	.002 Polished Chrome	192

Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019*.




Flush Valves

# Commercial Fittings

## Ultima™ Manual Exposed Clinic Sink Flush Valve – Diaphragm-Type

- Exclusive DynaClean™ self-cleaning wiper spring technology.
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- ADA-compliant non-hold open handle provides automatic shut-off after every flush
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit



Sensor-Operated Toilet Flush Valves	DESCRIPTION	COLOR/FINISH	LIST PRICE
<b>6.5 gpf/24.6 Lpf</b>			
  	<p><b>6147117 Exposed Flushometer For 1-1/2" (38 mm) Top Spud Bowls</b></p> <ul style="list-style-type: none"> <li>• 27" (686 mm) rough-in</li> <li>• Tube can be cut during installation for shorter rough-in</li> </ul>	.002 Polished Chrome	206












Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019.*

# Commercial Fittings

## Ultima™ Manual Exposed Urinal Flush Valve – Diaphragm-Type

- Exclusive DynaClean™ self-cleaning wiper spring technology
- Integral wiper spring cleans refill orifice with every flush to prevent valve run-on
- EvoLast™ premium chlorine-resistant diaphragm material resists premature deterioration and failure
- Proprietary brass alloy resists dezincification
- ADA-compliant non-hold open handle provides automatic shut-off after every flush
- High back pressure vacuum breaker prevents dripping
- Can be installed left- or right-handed
- All flush valves include sweat solder kit



Manual Urinal Flush Valves		DESCRIPTION	COLOR/FINISH	LIST PRICE
<b>1.0 gpf/3.8 Lpf</b>				
  	6145101	<b>Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	.002 Polished Chrome	192
<b>0.5 gpf/1.9 Lpf</b>				
  	6145051	<b>Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	 .002 Polished Chrome	192
<b>0.125 gpf/0.5 Lpf</b>				
  	6145013	<b>Exposed Flushometer For 3/4" (19 mm) Top Spud Urinals</b> <ul style="list-style-type: none"> <li>• 11-1/2" (292 mm) rough-in</li> </ul>	 .002 Polished Chrome	192

Flush valve accessories shown on pages 93-94 in the 2019 American Standard *Commercial Fittings and Fixtures List Price Guide Effective April 1, 2019*.

Flush Valves